


Stack and nest containers U-Turn, with grip openings

DSB64321 | Data sheet

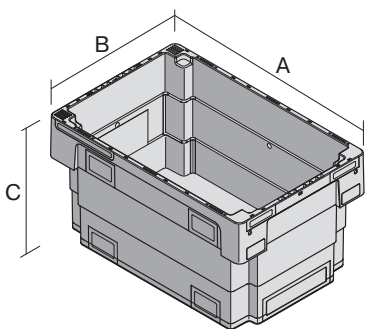

Pos. Dimensions, tolerances as specified in DIN 16901

A	Outside length top	600 mm
B	Outside width top	400 mm
C	Height	320 mm

Product features

Weight	2.00 kg
*Stacking load	180 kg
*Load capacity	20 kg
Volume	62 litres
Warranty	5 year BITO QUALITY
ESD	ESD version upon request
Temperature range	-20°C to +80°C
Food safety	✓
Material	PP
Stock item	–
Pcs/pack	1
colour	green
Ref. no.	C0501-0002

All written or verbal information about product properties and product application are given to the best of our knowledge. This information is based on our experience and cannot be warranted as the sole binding product properties. It is the customer's responsibility to check whether the ordered goods are suitable for the intended use. All measurements are subject to variations within the scope of the applicable manufacturing tolerances.

* Load capacity data according to EN 13117 refer to an ambient temperature of 23 °C.

Dimensions, tolerances as specified in DIN 16901


Outside length top	600 mm
Outside width top	400 mm
Height	320 mm
Inside length base	548 mm
Inside width base	348 mm
Useful interior height when stacked	301 mm

Information & Service
www.bito.com

BITO
STORAGE
SYSTEMS

Stack and nest containers U-Turn, with grip openings

DSB64321 | Accessories



Security seals

MBP1 - suited for BITOBOX MB

6-10810



Barcoded security seals

MBP3 - suited for BITOBOX MBs in all sizes and XLs 800 x 600 mm


6-31550



Sides with bag holder notches

demountable

6-31553



Drop-on lid

for stack and nest containers U-Turn
foldable

L 600 x W 400 mm

78-51030