
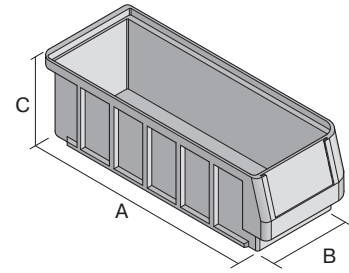


Storage and handling bins RK RK5109 | Data sheet

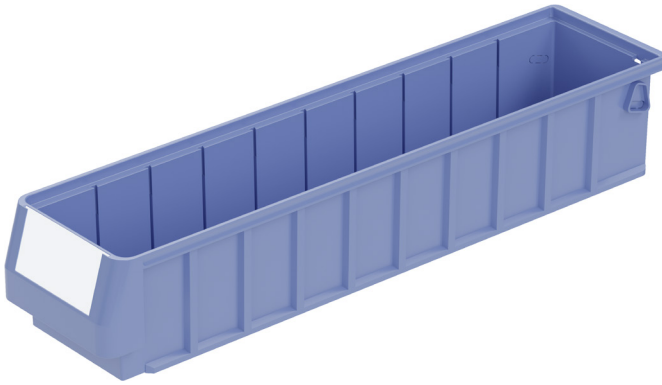

Pos. Dimensions, tolerances as specified in DIN 16901

Pos.	Dimensions, tolerances as specified in DIN 16901	
A	Outside length top	500 mm
B	Outside width top	117 mm
C	Height	90 mm

Product features

Weight	0.41 kg
*Stacking load	12 kg
*Load capacity	4 kg
Volume	3.5 litres
Warranty	5 year BITO QUALITY
ESD	ESD version upon request
Temperature range	-20°C to +80°C
Food safety	-
Material	recycled polypropylene
Stock item	✓
Pcs/pack	16
colour	dove blue
Ref. no.	3-1439

Other colours / special colours on request

All written or verbal information about product properties and product application are given to the best of our knowledge. This information is based on our experience and cannot be warranted as the sole binding product properties. It is the customer's responsibility to check whether the ordered goods are suitable for the intended use. All measurements are subject to variations within the scope of the applicable manufacturing tolerances.

* Load capacity data according to EN 13117 refer to an ambient temperature of 23 °C.

Dimensions, tolerances as specified in DIN 16901

Outside length top	500 mm
Outside width top	117 mm
Height	90 mm
Inside length top	460 mm
Inside width top	94 mm
Inside length base	456 mm
Inside width base	92 mm
Inside height	80 mm
Dimensions W x H x D	mm

Information & Service
www.bitocom

BITO
STORAGE
SYSTEMS


Storage and handling bins RK **RK5109** | Accessories



Carry/safety handle
for storage and handling bins RK
3-1514



Cross dividers
for storage and handling bins RK
3-1588



Label sheets
W 84 x H 39 mm
46-20768