
SK1610 | Data sheet



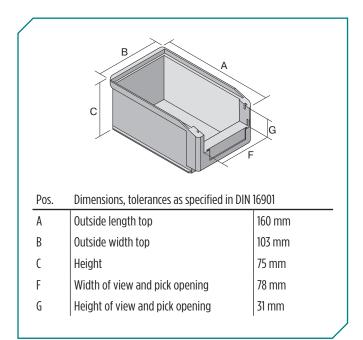

Product features	
Weight	0.09 kg
*Load capacity	2 kg
Volume	0.8 litres
Warranty	5 year BITO QUALITY
ESD	ESD version upon request
Temperature range	-20°C to +80°C
Food safety	✓
Material	PP
Stock item	PP
	PP – 1000
Stock item	-
Stock item Pcs/pallet	- 1000
Stock item Pcs/pallet Pcs/pack	- 1000 40

Other colours / special colours on request

All written or verbal information about product properties and product application are given to the best of our knowledge. This information is based on our experience and cannot be warranted as the sole binding product properties. It is the customer's responsibility to check whether the ordered goods are suitable for the intended use. All measurements are subject to variations within the scope of the applicable manufacturing tolerances.

 * Load capacity data according to EN 13117 refer to an ambient temperature of 23 °C.

Dimensions, tolerances as specified in DIN 16901		
Outside length top	160 mm	
Outside width top	103 mm	
Height	75 mm	
Inside length top	139 mm	
Inside width top	87 mm	
Inside length base	136 mm	
Inside width base	85 mm	
Inside height	68 mm	
Stacking height	68 mm	
Height below handle	13 mm	
Pick opening W x H	78 x 31 mm	
Label dimensions L x W	70 x 20 mm	
Printed message		
Pad printing area on short side (front)	40 x 10 mm	
Pad printing area on short side (rear)	60 x 30 mm	
Pad printing area on long side	110 x 40 mm	
Injection mold printing area on long side	110 x 25 mm	

Information & Service www.bito.com




Storage bins SK

SK1610 | Accessories




Label covers for storage bins SK L 71 x W 21 mm **2-1061**




Insertable windows for storage bins SK **2-1108**




Drop-on lids for storage bins SK L 149 x W 98/77 mm **2-19870**



Label sheets W 70.5 x H 20 mm **46-20774**



Louvred panel uprights L 1000 x W 35 x H 25 mm **8-5928**



Bin suspension rails L 1126 mm **8-7869**

Information & Service www.bito.com

