



## SHELVING

Ideal for warehouses, stockrooms and office environments







Carl Ronsse Managing Director BITO Systems nv

#### Shelving is as popular as ever!

Experts talking about trends and innovations in the intralogistics sector usually focus on fully or partially automated warehouses. However, investing in an automated solution is not always the key to improved efficiency. The broad product range typical of wholesale and retail businesses, small batch sizes in the manufacturing sector, short term contracts with logistics providers – all these developments clearly speak in favour of manually serviced warehouses. That's where shelving is the winner! The modular system is perfect for customising your shelving facility. Simply add extensions or fit the required accessories to meet changing needs. Take a look at how many shelving variations there are to suit your application!

> This brochure will provide you with many useful ideas for your next project!

#### About us – »Made in Germany«

BITO is a Germany based manufacturer with subsidiaries and distributors throughout the world. With a staff of around 800 and on a plant surface of more than 140 000 m<sup>2</sup> in Meisenheim and Lauterecken, we have specialised in storage and order picking systems, offering a customer-oriented and innovative product range for highest user demands. BITO is one of the few single source suppliers in the intralogistics sector. With one focus on direct sales, we ensure fast track product delivery to our customers. Products can be ordered from our print catalogues, through our online shop or by calling our sales teams. As a full service provider of storage and order picking solutions, our second focus is on providing our customers a concept-to-completion service for any project size.

Plant in Lauterecken





Plant in Meisenheim

# **BITO** – more than 50 years of experience in project business

Customer focus & support are top priorities at BITO! We offer a full service package including on-site visits, fast quotes, precision inhouse manufacturing, on-time assembly & start-up and a reliable after sales service.

#### **Technical advice**

Each project is accompanied from the start by an experienced local sales & project manager who keeps close contact with the assigned project manager at the BITO main office.

#### **Project coordination**

We think that reliable time management and competent support are key to the success of a project. Our customers can count on exact specification, true-to-size product manufacturing, an extensive quality assurance program and reliable assembly coordination – in short, we provide an all-inclusive project package!

#### After sales service

Operators of shelving and racking installations are legally obligated to have their facilities inspected at least once a year by a qualified person. BITO provides this inspection service. Our inspectors are trained and authorised to conduct all mandatory tests. They will get in the quotes for required spare parts and manage follow-up inspections.

For live storage installations and electronically regulated facilities, BITO recommend their customers to conclude a maintenance contract and have their storage and order picking installation regularly checked as to proper functioning and operational safety. Maintenance prevents disruptions and troublesome consequences. In case a semi-automatic system fails to perform properly despite all preventive measures, BITO has set up an emergency management plan to reduce idle times at your site to a minimum.



Customer-oriented and reliable project monitoring

### BITO



### Quick and easy to assemble in just a few steps!

The modularity of BITO shelving allows multiple configurations that perfectly adapt to your premises. Assembly is simple and can be done without bolts in a minimum of time. A wide variety of cleverly designed accessories caters for any purpose in any industry.

On the following pages you will find shelving variations, configuration options and product applications.



Fast and easy assembly without bolts

> Customise your shelving!

### **Product features** > Starter bay > Extension bay > Shelf

#### > Planning sizes to calculate space requirement: Length of starter bay: nominal shelf length + 58 mm Length of extension bay: nominal shelf length + 8 mm

Shelving depth starter and extension bay: nominal sizes + 24 mm

> Nominal sizes:

Shelf lengths: 750, 1000 and 1300 mm Shelving depths: 324, 424, 524, 624 and 824 mm Shelf depths: 300, 400, 500, 600 and 800 mm



»Not only good for stockrooms and archives – the clean design also looks great in offices!«



### Office and archive shelving: keep your records easily accessible and save space!

Although paperless storage is on the increase, there are many record types that have to be kept as hard-copy for many years. Space-saving, yet easily accessible storage of documents is therefore essential since available storage capacities are usually limited. For this reason, BITO archive shelving comes in various height and length options to fit your storage space. Further options include shelving for single-sided or double-sided use as well as shelving with

#### **Your benefits**

- > extensions possible whenever required
- > shelf levels can be adjusted in 25 mm increments

a galvanised finish or epoxy-coating in light grey, RAL 7035.

- > excellent rigidity
- > easy to assemble
- > shelf load in single-sided shelving 50 kg, in double-sided shelving 100 kg
- > bay load in single-sided shelving 500 kg, in double-sided shelving 800 kg

### BITO

### **Office shelving**

> epoxy-coated in light grey, RAL 7035





> double-sided use

| Office shelving | g   single-side   | Starter bay    | Extension bay |                    |               |          |          |
|-----------------|-------------------|----------------|---------------|--------------------|---------------|----------|----------|
| Shelving height | Number of shelves | Shelving depth | Useful depth  | Shelf length<br>mm | File capacity | Ref.no.  | Ref.no.  |
| 1850 5          | -                 | 324            | 300           | 750                | 45            | 10-33500 | 10-33508 |
|                 | 5                 | 324            | 300           | 1000               | 60            | 10-33501 | 10-33509 |
| 0000            | 6                 | 324            | 300           | 750                | 54            | 10-33502 | 10-33510 |
| 2200            |                   | 324            | 300           | 1000               | 72            | 10-33503 | 10-33511 |
| 0500            | 7                 | 324            | 300           | 750                | 63            | 10-33504 | 10-33512 |
| 2500            |                   | 324            | 300           | 1000               | 84            | 10-33505 | 10-33513 |
| 2000            | 0                 | 324            | 300           | 750                | 72            | 10-33506 | 10-33514 |
| 3000            | 8                 | 324            | 300           | 1000               | 96            | 10-33507 | 10-33515 |

| Office shelving | g   double-side      | Starter bay    | Extension bay |              |               |          |          |
|-----------------|----------------------|----------------|---------------|--------------|---------------|----------|----------|
| Shelving height | Number of<br>shelves | Shelving depth | Useful depth  | Shelf length | File capacity | Ref.no.  | Ref.no.  |
| mm              |                      | mm             | mm            |              |               |          |          |
| 1050            | F                    | 624            | 600           | 750          | 90            | 10-33517 | 10-33525 |
| 1850 5          | C                    | 624            | 600           | 1000         | 120           | 10-33518 | 10-33526 |
| 0000            | 6                    | 624            | 600           | 750          | 108           | 10-33519 | 10-33527 |
| 2200            |                      | 624            | 600           | 1000         | 144           | 10-33520 | 10-33528 |
| 0500            | 7                    | 624            | 600           | 750          | 126           | 10-33521 | 10-33529 |
| 2500            |                      | 624            | 600           | 1000         | 168           | 10-33522 | 10-33530 |
| 3000            | 0                    | 624            | 600           | 750          | 144           | 10-33523 | 10-33531 |
| 2000            | 8                    | 624            | 600           | 1000         | 192           | 10-33524 | 10-33532 |

| Accessories to suit office shelving   single-sided and double-sided use |   |                                       |                    |          |  |  |  |
|---|---|---------------------------------------|--------------------|----------|--|--|--|
| Description   |   | Suited for a<br>shelf length of<br>mm | Useful depth<br>mm | Ref.no.  |  |  |  |
| Additional shelves <ul> <li>light grey, RAL 7035</li> </ul>             | shelf load capacity 50 kg, shelf with integral retaining lip at rear, shelf height 25 mm, including 4 shelf clips   | 750                                   | 300                | 10-33550 |  |  |  |
|   |   | 1000                                  | 300                | 10-33551 |  |  |  |
|   | shelf load capacity 200 kg, shelf perforations on a 50 mm pitch to accept dividers, shelf height 40 mm, including 4 shelf clips   | 750                                   | 600                | 10-33552 |  |  |  |
|   | <b>shelf load capacity 100 kg</b> , shelf perforations on a 50 mm pitch to accept dividers, shelf height 40 mm, including 4 shelf clips   | 1000                                  | 600                | 10-33553 |  |  |  |
| Shelf dividers  | epoxy-coated in light grey, RAL 7035,<br>stand-alone use,<br>can be positioned anywhere along the shelf length,<br>suitable for office and archive shelving with 25 mm high shelves |                                       | 300                | 10-33554 |  |  |  |
| Centre rails  | galvanised, slot into shelf perforations,<br>suitable for all variations of office and archive shelving   | 750                                   | 600                | PMA6.75  |  |  |  |
|   |   | 1000                                  | 600                | PMA6     |  |  |  |

> galvanised





> double-sided use

| Archive shelving   single-sided use |                      |                |              |              |               |             | Extension bay |
|-------------------------------------|----------------------|----------------|--------------|--------------|---------------|-------------|---------------|
| Shelving height                     | Number of<br>shelves | Shelving depth | Useful depth | Shelf length | File capacity | Ref.no.     | Ref.no.       |
| тт                                  |                      | mm             | mm           |              |               |             |               |
| 1050                                | 5                    | 324            | 300          | 750          | 45            | SAR1835.75G | SAR1835.75A   |
| 1850                                | 5                    | 324            | 300          | 1000         | 60            | SAR1835G    | SAR1835A      |
|                                     | 6                    | 324            | 300          | 750          | 54            | SAR2236.75G | SAR2236.75A   |
| 2200                                |                      | 324            | 300          | 1000         | 72            | SAR2236G    | SAR2236A      |
| 0500                                | 7                    | 324            | 300          | 750          | 63            | SAR2537.75G | SAR2537.75A   |
| 2500                                |                      | 324            | 300          | 1000         | 84            | SAR2537G    | SAR2537A      |
|                                     | 8                    | 324            | 300          | 750          | 72            | SAR3038.75G | SAR3038.75A   |
| 3000                                |                      | 324            | 300          | 1000         | 96            | SAR3038G    | SAR3038A      |

| Archive shelvi  | ng   double-si       | Starter bay      | Extension bay    |              |               |             |             |
|-----------------|----------------------|------------------|------------------|--------------|---------------|-------------|-------------|
| Shelving height | Number of<br>shelves | Shelving depth   | Useful depth     | Shelf length | File capacity | Ref.no.     | Ref.no.     |
| mm              |                      | <i>mm</i><br>624 | <i>mm</i><br>600 | 750          | 90            | FAB1865.75G |             |
| 1850            | 5                    | -                |                  |              |               |             | FAR1865.75A |
|                 |                      | 624              | 600              | 1000         | 120           | FAR1865G    | FAR1865A    |
| 2200            | 6                    | 624              | 600              | 750          | 108           | FAR2266.75G | FAR2266.75A |
| 2200            |                      | 624              | 600              | 1000         | 144           | FAR2266G    | FAR2266A    |
| 2500            | 7                    | 624              | 600              | 750          | 126           | FAR2567.75G | FAR2567.75A |
| 2300            |                      | 624              | 600              | 1000         | 168           | FAR2567G    | FAR2567A    |
| 2000            | 0                    | 624              | 600              | 750          | 144           | FAR3068.75G | FAR3068.75A |
| 3000            | 8                    | 624              | 600              | 1000         | 192           | FAR3068G    | FAR3068A    |

| Accessories to suit archive shelving   single-sided and double-sided use |  |      |                    |          |  |  |  |
|--|--|------|--------------------|----------|--|--|--|
| Description  |  |      | Useful depth<br>mm | Ref.no.  |  |  |  |
| Additional shelves <ul> <li>galvanised</li> </ul>                        | <b>shelf load capacity 50 kg</b> , shelf with integral retaining lip at rear, shelf height 25 mm, including 4 shelf clips                              | 750  | 300                | SB375.4  |  |  |  |
|  |  | 1000 | 300                | SB131.4  |  |  |  |
|  | shelf load capacity 200 kg, shelf perforations on a 50 mm pitch to accept dividers, shelf height 40 mm, including 4 shelf clips                        | 750  | 600                | FB6752.4 |  |  |  |
|  | <b>shelf load capacity 100 kg</b> , shelf perforations on a 50 mm pitch to accept dividers, shelf height 40 mm, including 4 shelf clips                | 1000 | 600                | FB61.4   |  |  |  |
| Shelf dividers   | galvanised, stand-alone use,<br>can be positioned anywhere along the shelf length,<br>suitable for office and archive shelving with 25 mm high shelves |      | 300                | PF3      |  |  |  |
| Centre rails   | galvanised, slot into shelf perforations,<br>suitable for all variations of office and archive shelving  | 750  | 600                | PMA6.75  |  |  |  |
|  |  | 1000 | 600                | PMA6     |  |  |  |

### BITO



»Efficient and flexible – the shelving solution that adapts to your loads!«



### Shelving type EL and L: perfect for lightweight and standard loads

### BITO

Looking at the actual weight of shelved goods often shows that many shelving installations are "oversized" as to their load capacity. BITO shelving type EL is the ideal solution. Designed for light-weight applications, shelves carry up to 100 kg without the need for beams. Should your storage requirements change, it is no problem to upgrade shelving installations type EL to type L. Simply retrofit beams to increase bay load capacity from 800 kg to 1300 kg!

#### **Your benefits**

- > fast and easy assembly without bolts
- > extensions possible whenever required
- > shelf levels can be adjusted in 25 mm increments
- > shelves are perforated on the long sides to slot in dividers
- > all components are galvanised







#### Frames with connector plates

- supplied with 2 uprights, 3 to 5 upright connectors, 2 base plates
- supplied unassembled
- all parts galvanised, epoxy-coating in RAL colours upon request

| Height         | 1850 mm | 2000 mm | 2200 mm | 2500 mm | 3000 mm |
|----------------|---------|---------|---------|---------|---------|
| Shelving depth | Ref.no. | Ref.no. | Ref.no. | Ref.no. | Ref.no. |
| mm             |         |         |         |         |         |
| 324            | SNS1830 | SNS2030 | SNS2230 | SNS2530 | SNS3030 |
| 424            | SNS1840 | SNS2040 | SNS2240 | SNS2540 | SNS3040 |
| 524            | SNS1850 | SNS2050 | SNS2250 | SNS2550 | SNS3050 |
| 624            | SNS1860 | SNS2060 | SNS2260 | SNS2560 | SNS3060 |
| 824            | SNS1880 | SNS2080 | SNS2280 | SNS2580 | SNS3080 |

Shelves with perforations in 50 mm increments to slot in dividers, supplied with 4 shelf clips

| Load capacity 100 kg   |                    |                    | Shelf length 1000 mm | Shelf length 1300 mm |
|--|--------------------|--------------------|----------------------|----------------------|
| Colour   | Shelf height<br>mm | Useful depth<br>mm | Ref.no.              | Ref.no.              |
| galvanised   | 40                 | 300                | FB31.4               | FB313.4              |
|  |                    | 400                | FB41.4               | FB413.4              |
| and the second s |                    | 500                | FB51.4               | FB513.4              |
|  |                    | 600                | FB61.4               | FB613.4              |
| RAL 7035 Light grey  | 40                 | 600                | 10-33553             | -                    |



#### Cross bracing

- consisting of 2 struts and 2 tension jacks
- shelving runs with stiffening beams require 1 cross bracing kit for every 5 bays, shelving runs without stiffening beams require 1 cross bracing kit for every 2 bays
- galvanised

| For a shelf length of<br>mm | Ref.no. |
|-----------------------------|---------|
| 750                         | SDV75   |
| 1000, 1300                  | SDV     |

#### Shelf clips

4 shelf clips required per shelf


| Description | Pcs/pack | Ref.no. |
|-------------|----------|---------|
| Shelf clips | 4        | SFT4    |




#### Stiffening beams

- hook into the slotting pattern of the uprights, safety pins provide protection against unintentional lifting
- supplied with safety pins
- all parts galvanised, epoxy-coating in RAL colours upon request

| For a shelf length of<br>mm  | Height | Ref.no.  |
|------------------------------|--------|----------|
| 750                          | 40     | SLT075   |
| 1000                         | 40     | SLT1     |
| 1300                         | 40     | SLT1300  |
| 1000, for ultra-flat shelves | 20     | 53-33599 |









Length of starter bay

1058 mm

1358 mm

Length of extension bay 1008 mm

1308 mm

| Shelving type EL |                   |                |              |             | Shelf length 1000 mm |             | Shelf length 1300 mm |  |
|------------------|-------------------|----------------|--------------|-------------|----------------------|-------------|----------------------|--|
|                  |                   |                |              | Starter bay | Extension bay        | Starter bay | Extension bay        |  |
| Shelving height  | Number of shelves | Shelving depth | Useful depth | Ref.no.     | Ref.no.              | Ref.no.     | Ref.no.              |  |
| mm               |                   | mm             | mm           |             |                      |             |                      |  |
|                  | 5                 | 324            | 300          | FEL2031G    | FEL2031A             | FEL20313G   | FEL20313A            |  |
| 0000             |                   | 424            | 400          | FEL2041G    | FEL2041A             | FEL20413G   | FEL20413A            |  |
| 2000             |                   | 524            | 500          | FEL2051G    | FEL2051A             | FEL20513G   | FEL20513A            |  |
|                  |                   | 624            | 600          | FEL2061G    | FEL2061A             | FEL20613G   | FEL20613A            |  |
|                  |                   | 324            | 300          | FEL2531G    | FEL2531A             | FEL25313G   | FEL25313A            |  |
| 0500             | <u> </u>          | 424            | 400          | FEL2541G    | FEL2541A             | FEL25413G   | FEL25413A            |  |
| 2500             | 6                 | 524            | 500          | FEL2551G    | FEL2551A             | FEL25513G   | FEL25513A            |  |
|                  |                   | 624            | 600          | FEL2561G    | FEL2561A             | FEL25613G   | FEL25613A            |  |

| Shelving type L |          |                   |                |              | Shelf lengt   | h 1000 mm Shelf length 1300 mm |           |           |
|-----------------|----------|-------------------|----------------|--------------|---------------|--------------------------------|-----------|-----------|
|                 |          | Starter bay       | Extension bay  | Starter bay  | Extension bay |                                |           |           |
| Shelving height | Bay load | Number of shelves | Shelving depth | Useful depth | Ref.no.       | Ref.no.                        | Ref.no.   | Ref.no.   |
| тт              | kg       |                   | mm             | mm           |               |                                |           |           |
|                 |          |                   | 324            | 300          | FLT2031G      | FLT2031A                       | FLT20313G | FLT20313A |
| 2000            | 1300     | 5                 | 424            | 400          | FLT2041G      | FLT2041A                       | FLT20413G | FLT20413A |
| 2000            | 1300     |                   | 524            | 500          | FLT2051G      | FLT2051A                       | FLT20513G | FLT20513A |
|                 |          |                   | 624            | 600          | FLT2061G      | FLT2061A                       | FLT20613G | FLT20613A |
|                 |          | 6                 | 324            | 300          | FLT2531G      | FLT2531A                       | FLT25313G | FLT25313A |
| 0500            |          |                   | 424            | 400          | FLT2541G      | FLT2541A                       | FLT25413G | FLT25413A |
| 2500            | 1430     |                   | 524            | 500          | FLT2551G      | FLT2551A                       | FLT25513G | FLT25513A |
|                 |          |                   | 624            | 600          | FLT2561G      | FLT2561A                       | FLT25613G | FLT25613A |
|                 |          |                   | 324            | 300          | FLT3031G      | FLT3031A                       | FLT30313G | FLT30313A |
| 3000            | 1000     | 7                 | 424            | 400          | FLT3041G      | FLT3041A                       | FLT30413G | FLT30413A |
|                 | 1600     |                   | 524            | 500          | FLT3051G      | FLT3051A                       | FLT30513G | FLT30513A |
|                 |          |                   | 624            | 600          | FLT3061G      | FLT3061A                       | FLT30613G | FLT30613A |

BITO



»This is your shelving option for industrial applications!«



### Shelving type M and S: perfect for medium to heavy loads of up to 300 kg per shelf!

BITO

Shelving is expected to meet most diverse needs: large volume and heavy goods will need a larger level spacing than many small storage units which require more shelves on a small space. Headroom in high buildings is best used by multi-tier shelving. Lower construction heights allow handling without access equipment. Whatever your requirements are – our medium duty and heavy duty shelving will suit your needs.

Our range of functional accessories (see page 24 and 25) addresses almost any requirement.

#### Your benefits

- > fast and easy assembly without bolts
- > extensions possible whenever required
- > shelf levels can be adjusted in 25 mm increments
- > shelves are perforated on the long sides to slot in dividers
- > all components are galvanised





#### Frames with connector plates

- supplied with 2 uprights, 3 to 5 upright connectors, 2 base plates
- supplied unassembled
- all parts galvanised, epoxy-coating in RAL colours upon request

| Height         | 1850 mm | 2000 mm | 2200 mm | 2500 mm | 3000 mm |
|----------------|---------|---------|---------|---------|---------|
| Shelving depth | Ref.no. | Ref.no. | Ref.no. | Ref.no. | Ref.no. |
| mm             |         |         |         |         |         |
| 324            | SNS1830 | SNS2030 | SNS2230 | SNS2530 | SNS3030 |
| 424            | SNS1840 | SNS2040 | SNS2240 | SNS2540 | SNS3040 |
| 524            | SNS1850 | SNS2050 | SNS2250 | SNS2550 | SNS3050 |
| 624            | SNS1860 | SNS2060 | SNS2260 | SNS2560 | SNS3060 |
| 824            | SNS1880 | SNS2080 | SNS2280 | SNS2580 | SNS3080 |

#### Shelves with perforations in 50 mm increments to slot in dividers, supplied with 4 shelf clips

|              |                     | load capacity 300 kg                   |         |                      |
|--------------|---------------------|--|---------|----------------------|
| 200          | Shelf length 750 mm | elf length 750 mm Shelf length 1000 mm |         | Shelf length 1000 mm |
| Useful depth | Ref.no.             | Ref.no.                                | Ref.no. | Ref.no.              |
| mm           |                     |  |         |                      |
| 300          | FB3752.4            | FB32.4                                 | FB323.4 | -                    |
| 400          | FB4752.4            | FB42.4                                 | FB423.4 | FB43.4               |
| 500          | FB5752.4            | FB52.4                                 | FB523.4 | FB53.4               |
| 600          | FB6752.4            | FB62.4                                 | FB623.4 | FB63.4               |
| 800          | FB8752.4            | FB82.4                                 | FB823.4 | -                    |

#### Cross bracing, galvanised

consisting of 2 struts and 2 tension jacks

shelving runs with stiffening beams require 1 cross bracing kit for every 5 bays, shelving runs without stiffening beams require 1 cross bracing kit for every 2 bays

galvanised

F

| For a shelf length of<br>mm | Ref.no. |
|-----------------------------|---------|
| 750                         | SDV75   |
| 1000, 1300                  | SDV     |

#### Shelf clips

4 shelf clips required per shelf


| Description | Pcs/pack | Ref.no. |
|-------------|----------|---------|
| Shelf clips | 4        | SFT4    |




#### Stiffening beams

- hook into upright slotting pattern, safety pins provide protection against unintentional lifting
- supplied with safety pins
- all parts galvanised, epoxy-coating in RAL colours upon request

| For a shelf length of<br>mm  | Height | Ref.no.  |
|------------------------------|--------|----------|
| 750                          | 40     | SLT075   |
| 1000                         | 40     | SLT1     |
| 1300                         | 40     | SLT1300  |
| 1000, for ultra-flat shelves | 20     | 53-33599 |









Length of starter bay

1058 mm

1358 mm

Length of extension bay 1008 mm

| 1308 mm |  |
|---------|--|
|         |  |
|         |  |


| Shelving type M |          |                   |                |              | Shelf leng  | th 1000 mm    | Shelf length 1300 mm |               |
|-----------------|----------|-------------------|----------------|--------------|-------------|---------------|----------------------|---------------|
|                 |          |                   |                |              | Starter bay | Extension bay | Starter bay          | Extension bay |
| Shelving height | Bay load | Number of shelves | Shelving depth | Useful depth | Ref.no.     | Ref.no.       | Ref.no.              | Ref.no.       |
| mm              | kg       |                   | mm             | mm           |             |               |                      |               |
|                 |          |                   | 324            | 300          | FMT2032G    | FMT2032A      | FMT20323G            | FMT20323A     |
|                 |          |                   | 424            | 400          | FMT2042G    | FMT2042A      | FMT20423G            | FMT20423A     |
| 2000            | 1300     | 5                 | 524            | 500          | FMT2052G    | FMT2052A      | FMT20523G            | FMT20523A     |
|                 |          |                   | 624            | 600          | FMT2062G    | FMT2062A      | FMT20623G            | FMT20623A     |
|                 |          |                   | 824            | 800          | FMT2082G    | FMT2082A      | FMT20823G            | FMT20823A     |
|                 | 1430     |                   | 324            | 300          | FMT2532G    | FMT2532A      | FMT25323G            | FMT25323A     |
|                 |          |                   | 424            | 400          | FMT2542G    | FMT2542A      | FMT25423G            | FMT25423A     |
| 2500            |          | 6                 | 524            | 500          | FMT2552G    | FMT2552A      | FMT25523G            | FMT25523A     |
|                 |          |                   | 624            | 600          | FMT2562G    | FMT2562A      | FMT25623G            | FMT25623A     |
|                 |          |                   | 824            | 800          | FMT2582G    | FMT2582A      | FMT25823G            | FMT25823A     |
|                 |          |                   | 324            | 300          | FMT3032G    | FMT3032A      | FMT30323G            | FMT30323A     |
|                 |          |                   | 424            | 400          | FMT3042G    | FMT3042A      | FMT30423G            | FMT30423A     |
| 3000            | 1600     | 7                 | 524            | 500          | FMT3052G    | FMT3052A      | FMT30523G            | FMT30523A     |
|                 |          |                   | 624            | 600          | FMT3062G    | FMT3062A      | FMT30623G            | FMT30623A     |
|                 |          |                   | 824            | 800          | FMT3082G    | FMT3082A      | FMT30823G            | FMT30823A     |

| Shelving type S |          |                   |                |               | Shelf length 1000 mm |          |          |
|-----------------|----------|-------------------|----------------|---------------|----------------------|----------|----------|
|                 |          |                   | Starter bay    | Extension bay |                      |          |          |
| Shelving height | Bay load | Number of shelves | Shelving depth | Useful depth  | Ref.no.              | Ref.no.  |          |
| mm              | kg       |                   | mm             | mm            |                      |          |          |
|                 |          |                   | 424            | 400           | FST2043G             | FST2043A |          |
| 2000            | 1300     | 5                 | 524            | 500           | FST2053G             | FST2053A |          |
|                 |          |                   | 624            | 600           | FST2063G             | FST2063A |          |
|                 |          |                   | 424            | 400           | FST2543G             | FST2543A |          |
| 2500            | 1430     | 6                 | 524            | 500           | FST2553G             | FST2553A |          |
|                 |          |                   | 624            | 600           | FST2563G             | FST2563A |          |
|                 |          |                   |                | 424           | 400                  | FST3043G | FST3043A |
| 3000            | 1600     | 7                 | 524            | 500           | FST3053G             | FST3053A |          |
|                 |          |                   | 624            | 600           | FST3063G             | FST3063A |          |

RTO



»Colours will give your workplace the productive edge you have been looking for!«

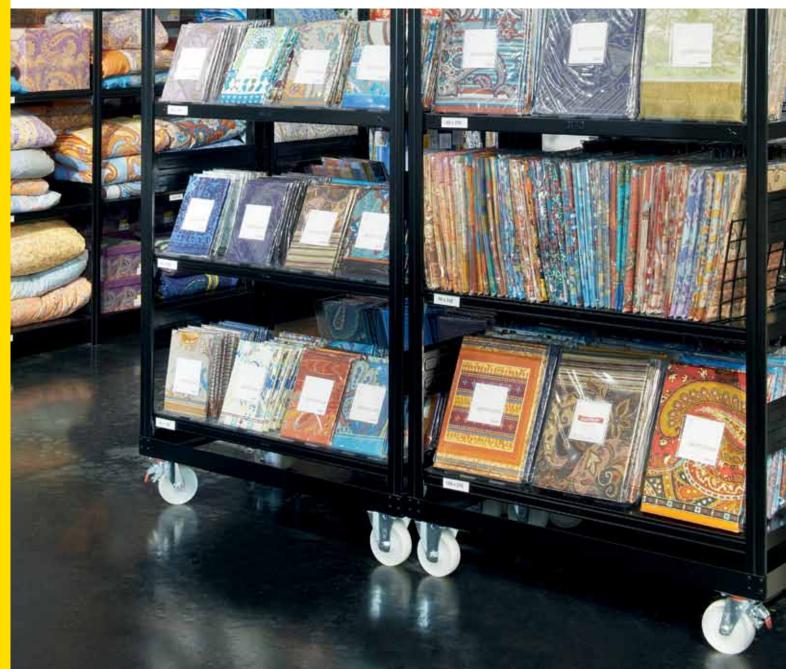

### **Colour up your work environment!**

BITO

Choosing the right colour scheme for your bins and containers or even your entire warehouse will not only find your employees more comfortable and efficient. Colours help to make a difference and to coordinate furnishings and equipment with corporate colours. Guided by these considerations, our storage and order picking equipment is available in a range of standard colours, but can also be manufactured in any requested colour for a brighter look, immediate product identification, easy picking, hence increased productivity.

#### **Your benefits**

- > improved product presentation
- > visual separation of work areas or product lines
- > colours help to organise quality control, for example to define storage areas for goods on hold
- > colours create a positive work environment









»Glass shelves are not only good for displaying art!«





### The right shelf for every application

Shelving in modern warehouses often has to meet special requirements. Choosing the right shelf type or a combination of various types is essential. Not only do they accommodate your storage goods, they also have to adapt to building constraints and to allow rearranging to reflect changes in handling procedures.

#### **Glass shelves**


Hygiene and immediate access to all products on stock are a crucial issue in the production and distribution of pharmaceuticals. Glass shelves and transparent shelf dividers help to meet these requirements.

#### **Ultra-flat shelves**

Continuous and above all space saving supply of small parts and components is fundamental to modern assembly processes. Our ultra-flat shelves provide up to 25% more storage capacity for your supplies!

#### Sprinkler shelves GRID

Warehouses fitted with a fire sprinkler system as well as cold stores are required to use shelves that allow water and air to pass through. BITO sprinkler shelves GRID meet this requirement and on top of this help to create a brighter work environment as light also filters through.

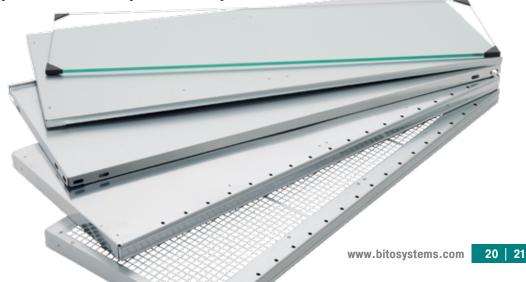

### **Perforated shelves GRID**

#### Perforated shelves GRID: for added fire protection

- > allow water penetration essential for environments with sprinklers/ for compliance with fire prevention regulations
- allow airflow to assist optimum ventilation in cold storage environments
- > allow light penetration for a brighter work enviroment
- > rectangular perforations
- > compatible with BITO standard boltless shelving of all types
- > with shelf perforations on a 50 mm pitch to slot in dividers
- > load capacity 100 kg
- > shelf height 40 mm
- > supplied with 4 shelf clips



#### Perforated shelves GRID permeability > 50%

in compliance with safety standard VdS CEA4001 which stipulates that water penetration of shelves must be at least 50%.

| colour     | load capacity | for a shelf length of | for a useful depth of | Ref. no. |
|------------|---------------|-----------------------|-----------------------|----------|
|            | kg            | тт                    | mm                    |          |
| galvanised | 100           | 1000                  | 400                   | 10-37914 |
|            |               |                       | 500                   | 10-37915 |
|            |               |                       | 600                   | 10-37916 |
|            |               |                       | 800                   | 10-37917 |
|            |               | 1300                  | 400                   | 10-37919 |
|            |               |                       | 500                   | 10-37920 |
|            |               |                       | 600                   | 10-37921 |
|            |               |                       | 800                   | 10-37922 |

#### Perforated shelves GRID permeability 44-50%

The shelves listed below have a smaller surface with a water permeability coefficient of up to 49%.

| colour     | load capacity | for a shelf length of | for a useful depth of | Ref. no. |
|------------|---------------|-----------------------|-----------------------|----------|
|            | kg            | mm                    | mm                    |          |
| galvanised | 100           | 750                   | 300                   | 10-37908 |
|            |               |                       | 400                   | 10-37909 |
|            |               |                       | 500                   | 10-37910 |
|            |               |                       | 600                   | 10-37911 |
|            |               |                       | 800                   | 10-37912 |
|            |               | 1000                  | 300                   | 10-37913 |
|            |               | 1300                  | 300                   | 10-37918 |

### Shelving with extra large shelves

#### Shelving with extra large shelves – extra large steel shelves and chipboard shelves

#### Great for goods which need some more space!

- > Load per level: 350 kg
- > Bay load capacity: max. 1600 kg
- > excellent price-performance ratio
- > easy assembly without bolts
- > stepped beams are height adjustable on a 25 mm pitch
- > steel panels sit flush with the upper beam edge
- > all shelving components galvanised
- > available in flame red, gentian blue, light grey

#### RAL 3000 RAL 5010 RAL 7035



| Shelving with extra large shelves - |                     |                        |                 | Bay width 1500 | ) mm        | Bay width 2000 mm |            |
|-------------------------------------|---------------------|------------------------|-----------------|----------------|-------------|-------------------|------------|
| extra large steel shelves           |                     |                        | Starter bay     | Extension bay  | Starter bay | Extension bay     |            |
| Shelving<br>height                  | Number<br>of levels | Shel-<br>ving<br>depth | Usable<br>depth | Ref. no.       | Ref. no.    | Ref. no.          | Ref. no.   |
| mm                                  |                     | mm                     | mm              |                |             |                   |            |
| 2000                                | 3                   | 524                    | 500             | GFRS20.15G     | GFRS20.15A  | GFRS20.25G        | GFRS20.25A |
|                                     |                     | 624                    | 600             | GFRS20.16G     | GFRS20.16A  | GFRS20.26G        | GFRS20.26A |
|                                     |                     | 824                    | 800             | GFRS20.18G     | GFRS20.18A  | GFRS20.28G        | GFRS20.28A |
| 2500                                | 4                   | 524                    | 500             | GFRS25.15G     | GFRS25.15A  | GFRS25.25G        | GFRS25.25A |
|                                     |                     | 624                    | 600             | GFRS25.16G     | GFRS25.16A  | GFRS25.26G        | GFRS25.26A |
|                                     |                     | 824                    | 800             | GFRS25.18G     | GFRS25.18A  | GFRS25.28G        | GFRS25.28A |

Length of starter Extensi

bay

1562 mm 2066 mm

Additional shelf levels

```
Extension bay
length
1512 mm
2016 mm
```

| Pos. | Description            |  | for a bay width of | for a useful<br>depth of | Ref. no.  |
|------|------------------------|--|--------------------|--------------------------|-----------|
|      |                        |  | mm                 | mm                       |           |
| A    | Additional shelf level | for shelving with extra<br>large steel shelves,<br>supplied with 2 galvanised<br>beams with adapters and<br>2 steel panels | 1500               | 500                      | GFF15.50S |
|      |                        |  |                    | 600                      | GFF15.60S |
|      |                        |  |                    | 800                      | GFF15.80S |
|      |                        |  | 2000               | 500                      | GFF20.50S |
|      |                        |  |                    | 600                      | GFF20.60S |
|      |                        |  |                    | 800                      | GFF20.80S |

| Shelving with extra large shelves – |                     |                        |                 | Bay width 1500 mm |             | Bay width 2000 mm |           |
|-------------------------------------|---------------------|------------------------|-----------------|-------------------|-------------|-------------------|-----------|
| chipboard shelves                   |                     |                        | Starter bay     | Extension bay     | Starter bay | Extension bay     |           |
| Shelving<br>height                  | Number<br>of levels | Shel-<br>ving<br>depth | Usable<br>depth | Ref. no.          | Ref. no.    | Ref. no.          | Ref. no.  |
| mm                                  |                     | mm                     | mm              |                   |             |                   |           |
| 2000                                | 3                   | 524                    | 500             | GFR20.15G         | GFR20.15A   | GFR20.25G         | GFR20.25A |
|                                     |                     | 624                    | 600             | GFR20.16G         | GFR20.16A   | GFR20.26G         | GFR20.26A |
|                                     |                     | 824                    | 800             | GFR20.18G         | GFR20.18A   | GFR20.28G         | GFR20.28A |
| 2500                                | 4                   | 524                    | 500             | GFR25.15G         | GFR25.15A   | GFR25.25G         | GFR25.25A |
|                                     |                     | 624                    | 600             | GFR25.16G         | GFR25.16A   | GFR25.26G         | GFR25.26A |
|                                     |                     | 824                    | 800             | GFR25.18G         | GFR25.18A   | GFR25.28G         | GFR25.28A |

| Pos. | Description            |  | for a bay width of | for a useful<br>depth of | Ref. no. |
|------|------------------------|--|--------------------|--------------------------|----------|
|      |                        |  | mm                 | mm                       |          |
| Α    | Additional shelf level | for shelving with extra<br>large chipboard shelves,<br>supplied with 2 galvanised<br>beams with support bars<br>and, depending on the bay<br>width, 3 or 4 chipboard<br>panels | 1500               | 500                      | GFF15.50 |
|      |                        |  |                    | 600                      | GFF15.60 |
|      |                        |  |                    | 800                      | GFF15.80 |
|      |                        |  | 2000               | 500                      | GFF20.50 |
|      |                        |  |                    | 600                      | GFF20.60 |
|      |                        |  |                    | 800                      | GFF20.80 |



Length of starter bay length 1562 mm 1512 n 2066 mm 2016




#### Additional shelf levels





»Maintain the appearance and performance of your tyres!«

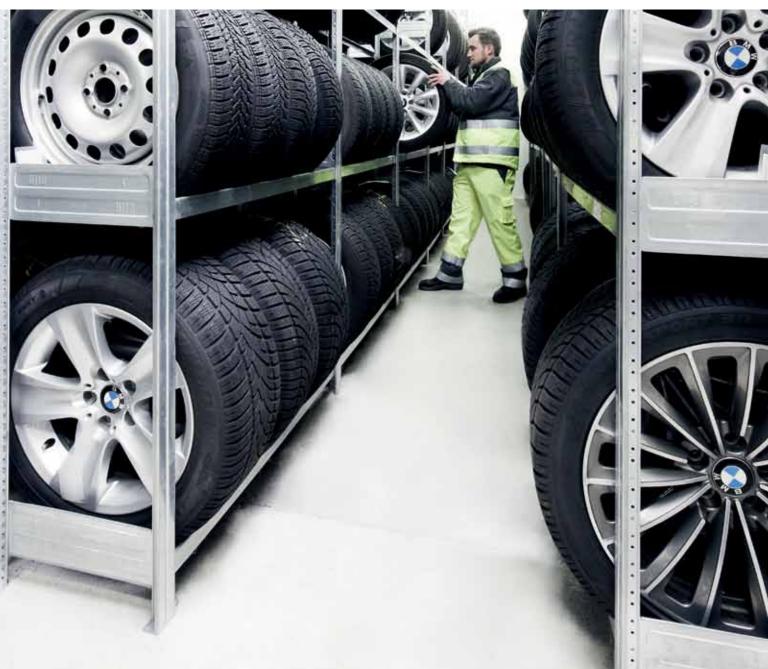

### **Proper and space-saving tyre storage**

BITO tyre shelving comes in various dimensions and load capacities to ensure you can choose the shelving layout that suits you.

#### Your benefits

- > max. load per level 250 kg
- > max. bay load up to 800 kg
- > suitable for tyre diameters from 578 to 624 mm
- > safe storage, convenient access

| Tyre shelving, galvanised |              |                 |                  | Starter bay | Extension bay |
|---------------------------|--------------|-----------------|------------------|-------------|---------------|
| Load per level            | Shelf length | Shelving height | Number of levels | Ref.no.     | Ref.no.       |
| kg                        |              | mm              |                  |             |               |
|                           | 1300         | 1850            | 3                | SRR18.13G   | SRR18.13A     |
|                           |              | 2500            | 4                | SRR25.13G   | SRR25.13A     |
| 150                       |              | 3000            | 5                | SRR30.13G   | SRR30.13A     |
| 150                       |              | 1850            | 3                | SRR18.15G   | SRR18.15A     |
|                           | 1500         | 2500            | 4                | SRR25.15G   | SRR25.15A     |
|                           |              | 3000            | 5                | SRR30.15G   | SRR30.15A     |
|                           |              | 1850            | 3                | SRR18.3G    | SRR18.3A      |
| 250                       | 1000         | 2500            | 4                | SRR25.4G    | SRR25.4A      |
|                           |              | 3000            | 5                | SRR30.5G    | SRR30.5A      |

| Accessories to suit tyre shelving |  |                    |                    |         |  |  |  |
|-----------------------------------|--|--------------------|--------------------|---------|--|--|--|
| Description                       |  | Shelf length<br>mm | Useful depth<br>mm | Ref.no. |  |  |  |
| Additional shelves                | shelf load capacity 100 kg,<br>shelf perforations on a 50 mm pitch to accept dividers, | 1000               | 400                | FB41.4  |  |  |  |
|                                   | nelf height 40 mm, including 4 shelf clips   | 1300               | 400                | FB413.4 |  |  |  |
| Tyre beams                        | space-saving storage of tyres and rims,  | 1000               | 400                | STR10.2 |  |  |  |
|                                   | supplied with safety pins, galvanised  | 1300               | 400                | STR13.2 |  |  |  |
|                                   |  | 1500               | 400                | STR15.2 |  |  |  |





»Unbeatable: BITO shelving and BITO bins are a perfect match!«



# The optimum solution for supplying small parts in any storage environment

BITO

Whether you need to supply small parts in production and assembly areas, the goods-out department or in your warehouse, you can rely on BITO to provide the optimum solution for your application.

**Your benefits:** As BITO is one of the few manufacturers of shelving & racking as well as bins & containers, we are able to offer both product groups perfectly coordinated.

#### Your options:

- > shelving units can be supplied as static or as mobile version
- > several bin series and sizes will fit
- > useful as stand-alone solution or integration into a Kanban solution
- > shelves can be adjusted in horizontal or inclined position



The BITO Kanban solution is perfect for compact storage and ergonomic picking of C-items.

### A wide variety of accessories gives room to your ideas!



- 1 Double door
- 2 Garment rail
- 3 Wire-mesh back cladding
- 4 Spigots for louvered panels
- 5 Louvered panels to fit to shelving rear
- 6 Single drawer
- 7 Wire divider
- 8 Shelf divider, can be positioned anywhere along the shelf length
- 9 Wire shelf

- 10 Tray shelf
- 11 Divider bar for long goods
- 12 Drawer blocks with 3 or with 7 shelves
- 13 Wire-mesh divider
- 14 Wire basket
- 15 Solid shelf divider
- 16 Wire-mesh side cladding
- 17 Bin shelf for loose goods
- 18 Louvered panels to fit to shelving sides



BITO shelving is an established brand that is used in almost every industrial sector. We supply high quality shelving that is easy to assemble and comes with a comprehensive range of useful accessories to suit your application. You have to cope with changing requirements? No problem – BITO shelving can be retro-fitted at any time!

> BITO shelving can be retro-fitted and reconfigured as needed!

### BITO



»Make full use of the available headroom in your warehouse!«



### Single-tier and multi-tier shelving

Shelving is mostly used for storing and picking unpalletised goods, small parts from bins, individual storage units or loose products. A broad range of modular accessories allows to customise your shelving to your needs and to stay organized.

With multi-tier shelving, you will "multiply" floor surface by making best use of the available warehouse height. Moreover, compact storage speeds up order processing.

Stairs and/or elevators link each walkway for safe and fast access to the various tiers.



BITO



»Mezzanines turn empty overhead space into productive work areas!«



### **BITO Multi-tier shelving and mezzanines**

Make the most of unused headroom with free standing or shelving supported steel structures and take productivity to new levels!

#### **System benefits**

- > optimum space utilisation
- > perfect integration into existing shelving and racking facilities
- > various steel profile strengths cater for your load requirements
- > short construction time
- > auditable structural analysis in line with your local regulations can be supplied upon request

#### **Added benefits**

- > platform and walkway decking to your choice
- > pallet transfer positions
- > stairways
- > side and back cladding for your shelving
- > many accessories to enhance performance





»Effective shelving and racking installations: Save space and time!"!«



### Three-tier installation: reliable product supply Case study: RICHTER + FRENZEL

#### Company

The family owned company Richter + Frenzel is one of the market leading wholersalers of sanitary & plumbing installations and services in Germany. Quality awareness and competent advice have been key to business success. The wide product range includes sanitary, heating and ventilation installations for private and trade customers.

#### Requirements

- > 23000 SKUs had to be accommodated as well as other products. Depending on market requirements: option of adding a fourth tier.
- > The items, mainly smaller size products as well as connecting and mounting parts, were to be stocked in a shelving facility, either directly on the shelf or in BITO storage bins with pick opening.

#### Solutions

- The three-tier shelving installation with integrated bin conveyors (photo on left side) provides 27000 storage positions – sufficient capacity for the entire small parts range of Richter + Frenzel.
- Each tier (photo below) has its own picking staff to reduce walking and improve pick times.

#### Implementation

> With the central warehouse in the Rhein-Main-Neckar area reaching capacity limits and with continued business growth after an acquisition, stock-keeping had to be distributed on 2 sites.

In order to avoid double stock-keeping, the company decided to build a new warehouse.

BITO

#### Benefits

- lean, no-compromise solution
- optimum configuration of storage and conveyor facilities ensure maximum product availability
- continuous supply of products, even in peak times




#### > Maximum space utilisation with multi-tier storage

Good use of the available warehouse space with respect to floor surface and building height is crucial for the efficiency of a storage facility. Multi-tier shelving – whether used as stand-alone solution or as part of a facility combining several storage systems – helps to increase the degree of capacity utilisation as the initially available floor space doubles or triples.

A mezzanine floor is a very easy and low cost way to create extra space since the components of the shelving structure serve as supporting elements for overhead constructions.


Efficiency can further be increased by implementing appropriate warehouse management procedures and by integrating suitable conveying equipment such as continuous conveyors or hoists.

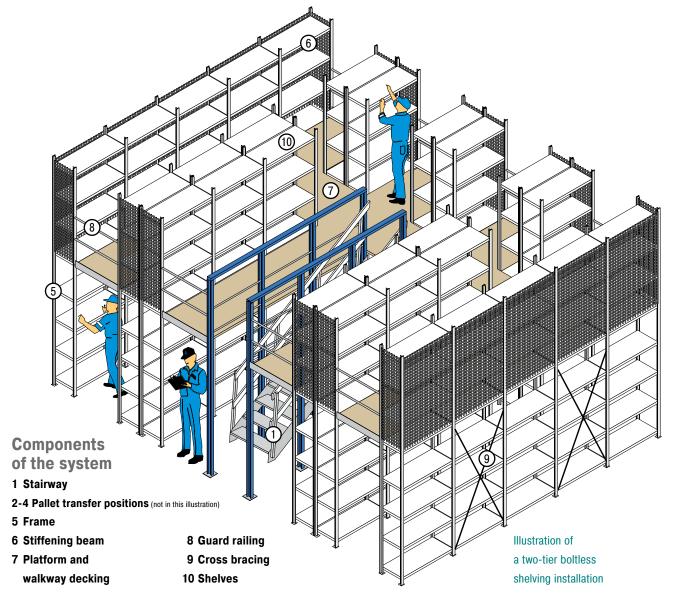

#### 1 Stairways


Various configurations to choose from. Treads can be supplied with mesh decking, chequer plate or wood decking. Stairway width 800 or 1000 mm. Other widths upon request.






#### > Use existing space and stay flexible

Another way to maximize the use of vertical space is to install BITO mezzanines. Mezzanine structures can be single-level or multi-level. They are constructed with hot rolled or cold rolled steel profiles to support the required load capacity and can be designed to adapt to any building constraint.

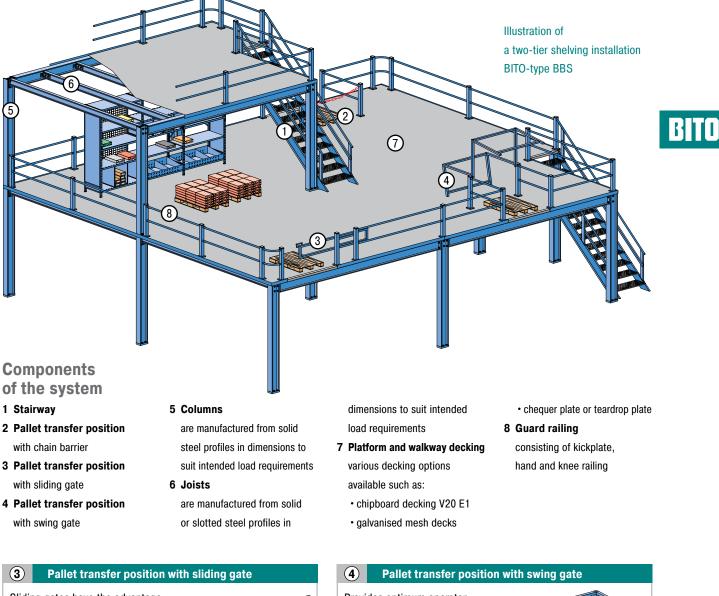




### Provides optimum operator

protection as the gate is always closed, either in front of or behind the pallet transfer position.





»Your single source product and service supplier: from bins to high bay racking – from planning to installation start-up.«

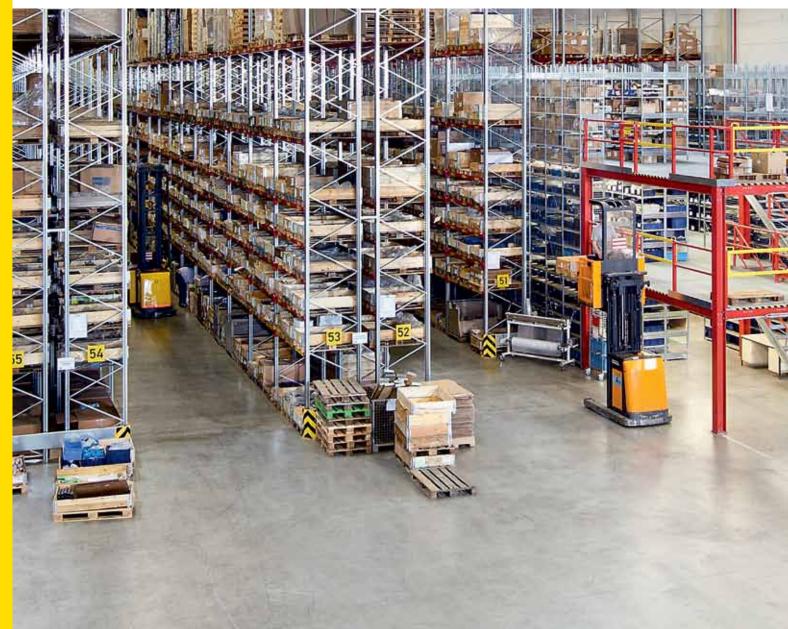

# **BITO** invites you to the world of storage and handling

#### **BITO** shelving & racking

Our shelving & racking range includes boltless and bolted shelving, shelving with extra large shelves, wide span and heavy duty shelving, pallet racking, cantilever racking, mobile shelving and racking, multi-tier facilities, carton and pallet live storage as well as automated storage installations. Whether you opt for a conventional solution or an automated live storage installation – the BITO team will be pleased to assist you in making the right choice for your application.


#### **BITO bins & containers**

BITO provides a huge range of bins and containers in any size and for any application. Discover our bins for storage, handling and order picking, our stacking containers in European standard sizes and our successful distribution container series. In addition, we offer bins and trays for automated small parts storage and containers in pallet size.

#### A broad range of accessories ...

... workbenches, transport dollies, order picking and shelf trolleys, bins and cupboards, steps, labels, label holders and safety equipment tops off our product range.

- > Whatever you need for efficient storage –
- > you can rely on BITO as your single source supplier!

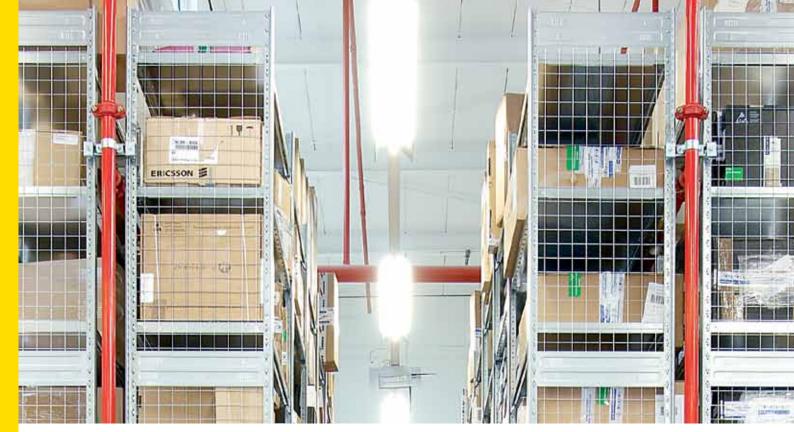

»More than 5,000 products direct from the manufacturer.«



### We are at your service!

#### **Fast track ordering**



Catalogue and online shopping, a varied selection of special offers, instant advice provided on the phone by skilled staff, quick quotations, an attractive price performance ratio, short delivery times, and, if things should not be the way you want, the ability to handle claims fast and professionally – all this contributes to the success of a direct sales business. As a manufacturer of storage, order picking and handling equipment »Made in Germany« for more than 50 years offering a range of more than 5,000 products, we know our business and are happy to share our know-how with our customers. On-going product and market research help us to continuously extend our range and our services to provide you with everything you would expect from your single source supplier.

#### Support & Planning



Fast material flow and lean procedures – these factors are key to any intralogistics process. They will only make their full impact if combined with storage and order picking systems that are perfectly adapted to the requirements of a specific project. When it comes to realising such systems, BITO has a clear advantage over other suppliers. At BITO, we design and manufacture all products in our own plants. On top of this, we assume all project-related tasks from layout planning to system commissioning. This ensures highest levels of transparency and efficiency. Even tight time schedules can realised because there are no delays in the flow of information between the departments involved and there is no loss of information due to additional interfaces.



"We're wherever you are!"



## Hauptverwaltung Headquarters

### The **BITO** group

### BITO

#### **Our subsidiaries:**

- > Belgium
- > Bulgaria
- > Denmark
- > Dubai (Middle East)
- > France
- > United Kingdom
- > Italy
- > The Netherlands
- > Austria

- > Poland
- > Russia
- > Switzerland
- > Slovakia
- > Spain > Czech Republic
- > Ukraine
- > Hungary

> Meisenheim and Lauterecken

#### **Partners:**

**Plants in:** 

> India

BITO maintains multiple sales partnerships worldwide.

#### **BITO Lagerteknik** in Denmark

**BITO Systems** 

in Belgium











Plant India

in the UK

BITO Polska

in Poland





www.bitosystems.com

Head office BE: BITO Systems nv Boomsesteenweg 97 B-2630 Aartselaar Tel. 03 / 870 99 00 Fax: 03 / 870 99 01 Office The Netherlands: **BITO Systems nv** Niasstraat 1 NL-3531 WR Utrecht Tel. 030 / 711 30 90 Fax: 030 / 711 30 91

info@bitosystems.com www.bitosystems.com