


Small parts containers KLT, hinged on one side and closed with 2 snap locks on the other side

KLT64420ASDV | Data sheet

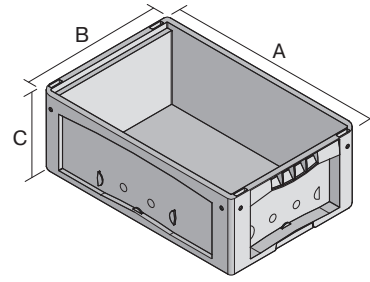

Pos. Dimensions, tolerances as specified in DIN 16901

Pos.	Dimensions, tolerances as specified in DIN 16901	
A	Outside length top	600 mm
B	Outside width top	400 mm
C	Height	438 mm

Product features

Weight	4.59 kg
*Stacking load	500 kg
*Load capacity	50 kg
Volume	78.00 litres
Warranty	5 year BITO QUALITY
ESD	ESD version upon request
Temperature range	-20°C to +80°C
Food safety	✓
Material	PP
Stock item	✓
Pcs/pack	1
colour	turquoise
Ref. no.	9-22247

Other colours / special colours on request

All written or verbal information about product properties and product application are given to the best of our knowledge. This information is based on our experience and cannot be warranted as the sole binding product properties. It is the customer's responsibility to check whether the ordered goods are suitable for the intended use. All measurements are subject to variations within the scope of the applicable manufacturing tolerances.

* Load capacity data according to EN 13117 refer to an ambient temperature of 23 °C.

Dimensions, tolerances as specified in DIN 16901

Outside length top	600 mm
Outside width top	400 mm
Height	438 mm
Inside length top	541 mm
Inside width top	368 mm
Inside height	416 mm

Information & Service
www.bitto.com

BITO
STORAGE
SYSTEMS

Small parts containers KLT, hinged on one side and closed with 2 snap locks on the other side

KLT64420ASDV | Accessories




Labels

suited for BITOBOX XL and KLT with a height of at least 170 mm

W 210 x H 74 mm

43-14557

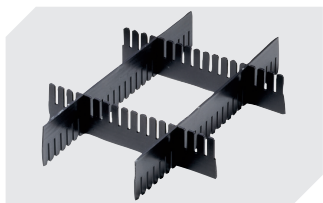

Slot-in divider strips

Material thickness 5 mm

L 1150 x H 50 mm


43-18417



Covers for palletised loads

L 1220 x W 820 mm

9-18421

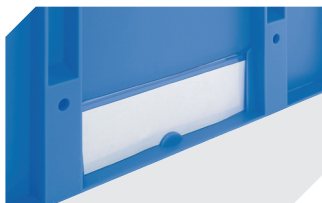

Label covers

for European size stacking containers

XL and small parts containers KLT

W 209 x H 67 mm

9-20053



Transport dollies

rubber wheels

L 620 x W 420 mm

43-21883



Document pockets

self-adhesive

3 sides open

L 175 x W 105 mm

6-5031