




# PERFORATED SHELVES GRID

for added fire protection

**NEW**



**BITO**


*...or how do you store?*

# PERFORATED SHELVES GRID



## for added fire protection

- Allow water penetration – essential for environments with sprinklers/ for compliance with fire prevention regulations
- Allow airflow to assist optimum ventilation in cold storage environments
- Allow light penetration for a brighter work environment
- Rectangular perforations
- Compatible with BITO standard boltless shelving of all types
- With shelf perforations on a 50 mm pitch to slot in dividers
- Load capacity 100 kg
- Shelf height 40 mm
- Supplied with 4 shelf clips

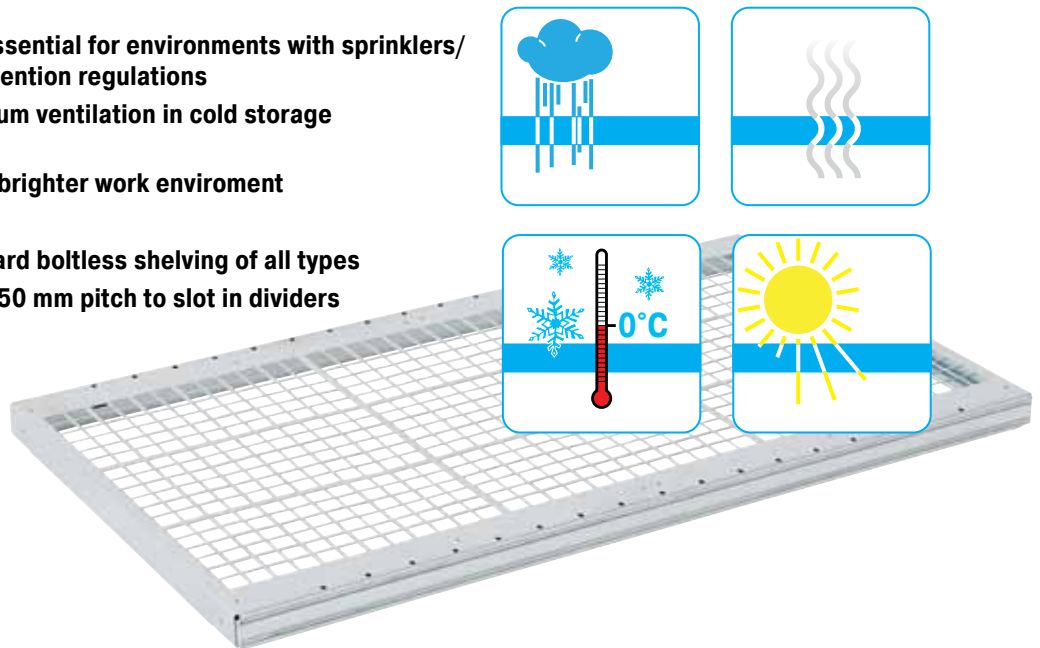

### Permeability > 50%

- In compliance with safety standard VdS CEA4001 which stipulates that water penetration of shelves must be at least 50%

Colour	Load capacity	For a shelf length of	For a useful depth of	Ref. no.	Price/ piece
	kg	mm	mm		€
galvanised	100	1000	400	10-37914	22,00
			500	10-37915	25,60
			600	10-37916	29,20
			800	10-37917	36,40
		1300	400	10-37919	29,70
			500	10-37920	33,80
			600	10-37921	37,90
			800	10-37922	46,10

### Permeability 44-50%

- The shelves listed below have a smaller surface with a water permeability coefficient of up to 49%

Colour	Load capacity	For a shelf length of	For a useful depth of	Ref. no.	Price/ piece
	kg	mm	mm		€
glanzverzinkt	100	750	300	10-37908	14,90
			400	10-37909	17,90
			500	10-37910	21,00
			600	10-37911	24,10
			800	10-37912	30,20
			1000	10-37913	18,40
		1300	10-37918	25,60	

**BITO-Lagertechnik**  
**Bittmann GmbH**  
 Obertor 29  
 D-55590 Meisenheim

Tel. +49 (0) 67 53 - 122-0  
 Fax +49 (0) 67 53 - 122-399  
[info@bito.com](mailto:info@bito.com)  
[www.bitto.com](http://www.bitto.com)



# BITO

*...or how do you store?*