
SK1095 | Data sheet



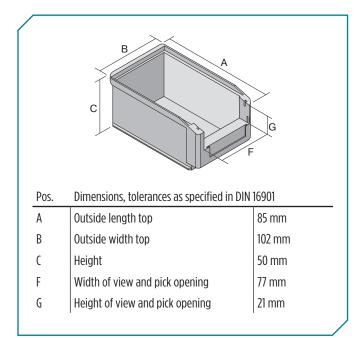

Product features	oduct features	
Weight	0.04 kg	
*Load capacity	1 kg	
Volume	0.25 litres	
Warranty	5 year BITO QUALITY	
ESD	ESD version upon request	
Temperature range	-20°C to +80°C	
Food safety	✓	
1 ood salety		
Material	PP	
·	PP –	
Material	PP - 3360	
Material Stock item	-	
Material Stock item Pcs/pallet	- 3360	
Material Stock item Pcs/pallet Pcs/pack	- 3360 60	

Other colours / special colours on request

All written or verbal information about product properties and product application are given to the best of our knowledge. This information is based on our experience and cannot be warranted as the sole binding product properties. It is the customer's responsibility to check whether the ordered goods are suitable for the intended use. All measurements are subject to variations within the scope of the applicable manufacturing tolerances.

 * Load capacity data according to EN 13117 refer to an ambient temperature of 23 °C.

Dimensions, tolerances as specified in DIN 16901		
Outside length top	85 mm	
Outside width top	102 mm	
Height	50 mm	
Inside length top	69 mm	
Inside width top	90 mm	
Inside length base	66 mm	
Inside width base	86 mm	
Inside height	43 mm	
Stacking height	46 mm	
Height below handle	10 mm	
Pick opening W x H	77 x 21 mm	
Label dimensions L x W	68,5 x 12,5 mm	
Printed message		
Pad printing area on short side (rear)	60 x 20 mm	
Pad printing area on long side	50 x 20 mm	
Injection mold printing area on long side	30 x 20 mm	

Information & Service www.bito.com



Storage bins SK


SK1095 | Accessories



Drop-on lids for storage bins SK L 71 x W 97/76 mm **2-19545**



Label covers for storage bins SK L 68.5 x W 12.5 mm **2-19547**



Label sheets W 68.5 x H 12.5 mm **46-20773**

Information & Service www.bito.com

