


BITO FOLDING BOX EQ

(R)evolutionizes ergonomics and efficiency

**HANDLING
PERFORMANCE
AT ITS BEST**

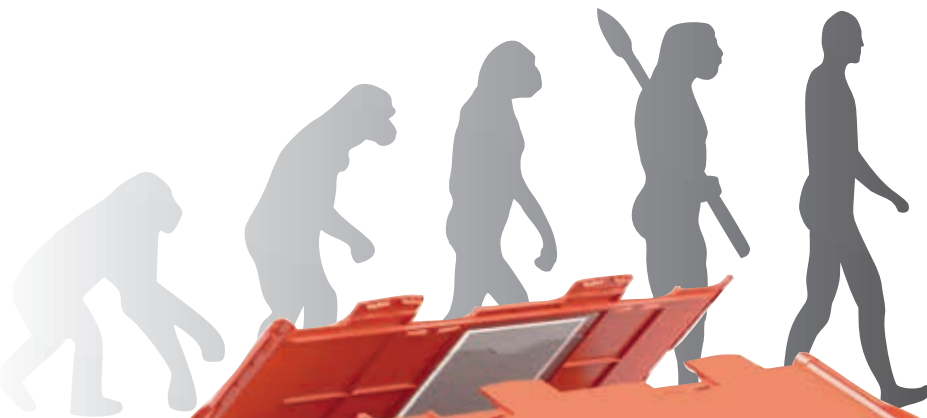

NEW!
Multipurpose
folding box
with a genius
EQ score!

BITO

...or how do you store?



Take a (r)evolutionary approach to modern handling!

The folding box that really improves workplace ergonomics



Seesaw locking/unlocking profile

- Sides lock open with a simple push on the box shoulder
- Easy-to-operate mechanism prevents injury
- Developed in cooperation with leading ergonomists



Fold-up grip

- Optional feature
- Provides ease of handling for containers without grip opening
- Convenient and safe handling while folding box sides are completely closed



Permanently attached **interlocking lids** on request, tamper evident security seals are available separately.



Base options:

Standard base, ribbed base or double base

Inside label holder

- Optional feature
- Fitted inside, loss-proof
- Keeps container sides clean from sticky labels and glue residue
- Reduces cleaning costs

Awards:



reddot design award
winner 2016



pro-K award



WORLDSTAR
WINNER 2016



BITOBOX EQ

The folding box that scores high on comfort and durability

- > Folds flat to save storage space when not in use
- > Space saving ratio of 4:1
- > The ribbed base and double base versions are also suited for automated storage



BITO



| BITO FOLDING BOX | EQ 64281 | EQ 64321 |
|------------------|--|-----------------------------|
| Dimensions | 600 x 400 x 285 mm | 600 x 400 x 320 mm |
| Load capacity | 20 kg / 50 kg (double base) | 20 kg / 50 kg (double base) |
| Stacking load | 180 kg | 180 kg |
| Material | PP-Copo | PP-Copo |
| Accessories | Drop-on lid (integrates into folded box stacks) • security seals • container dolly | |

Hoofdkantoor België:

**BITO Systems nv
Boomsesteenweg 97
B-2630 Aartselaar**

**Tel.: 03 870 99 00
Fax: 03 870 99 01**

**info@bitosystems.com
www.bitosystems.com**

Kantoor Nederland:

**BITO Systems nv
Niasstraat 1
NL-3531 WR Utrecht**

**Tel: 030 / 711 30 90
Fax: 030 / 711 30 91**